HOBART

HTi
Self-Service Scale with Large Elevated Display

MODELS

Model	Feature	Operating System	Available Storage
❑ **HTi-SSLS**	None	Linux	4 GB
❑ **HTi-SSLSB**	Barcode Scanner	Linux	4 GB

STANDARD FEATURES

+ Large elevated 14" touch screen display
+ Intuitive and customizable graphical user interface
+ Built-in wireless and wired Ethernet standard
+ Best seller keys
+ Search by image, description or PLU number
+ COOL (country of origin labeling)
+ UPC, EAN 13, EAN 128 Barcodes and GS1 DataBar
+ Onscreen keypad
+ Cassette label loading system provides fast and efficient change of label stock.
+ Meets federal labeling requirements
+ Remotely access the scale using Hobart specific software
+ Goes back to home page when not used for 30 seconds
+ Onscreen prompts for ease of use
+ Optional free-standing pedestal and bowl for self-serve scale

TYPICAL LOCATIONS

+ Bagel kiosk
+ Bulk candy
+ Bulk cookies
+ Bulk hardware
+ Donut kiosk
+ Salad bar
+ Bakery – by each
+ Bulk coffee
+ Bulk foods
+ Bulk pet foods produce

ACCESSORIES (Available at extra cost)

❑ HT-BOWLSS – Bowl for HT Self-Serve Scale
❑ HT-STAND – Free-standing pedestal for HT Self-Serve Scale

SOFTWARE

+ Linux embedded operating system
+ Interfaces with scale management software such as:
    – Invatron's PLUM
    – ADC's Interscale
    – Genesis Software
    – Data GateWeigh
    – HCT
    – Hobart HTe software
        • Content management
        • Label editing
        • Remote updates

SPECIFIER STATEMENT

Self-serve HTi scales include a large elevated display, dual-core processor and Linux operating system. HT scales weigh, automatically compute a price from stored PLU's, and print a label. The HT scales utilize Hobart's patented, three screen swipe technology user interface for operator ease of use. Scales on the same network may connect remotely to other scales for a HWS (Hand Wrap Station) or other applications.

The free-standing pedestal and bowl are optional accessories for the self-service scale.

TECHNICAL SPECIFICATIONS

+ 14" touch screen display - WSVGA TFT LCD, LED backlit, 5 wire resistive type

+ Dual-core processor

+ 1GB DDR3 RAM memory

+ 8GB micro SD for storage

+ Both 802.3 10/100 Mbps Ethernet and 802.11 a/b/g/n wireless out of box

+ Bluetooth 2.1 optional

+ High resolution thermal printhead for detailed graphics (store logos) and smaller bar codes – 203 dpi (8 dots per mm)

+ Accepted labels:
  – 1.5" and 2.25" width
  – 1" to 9.5" length die cut labels
  – Continuous labels
  – Oval labels

SPECIFICATIONS

Platter: 14" wide x 15" deep

Weigher Capacity:
0 lb. - 12 lb. x 0.005 (0 - 6 kg x .002 kg)
12 lb. - 30 lb. x 0.01 (0 - 15 kg x .005 kg)

Pricing Capacity: Up to 999.99 in steps of .01

Electrical: 100-240 volts, 50-60 Hz, single phase, 1.42 amps, 170 watts max. 9 foot standard cord cap with ground type plug furnished.
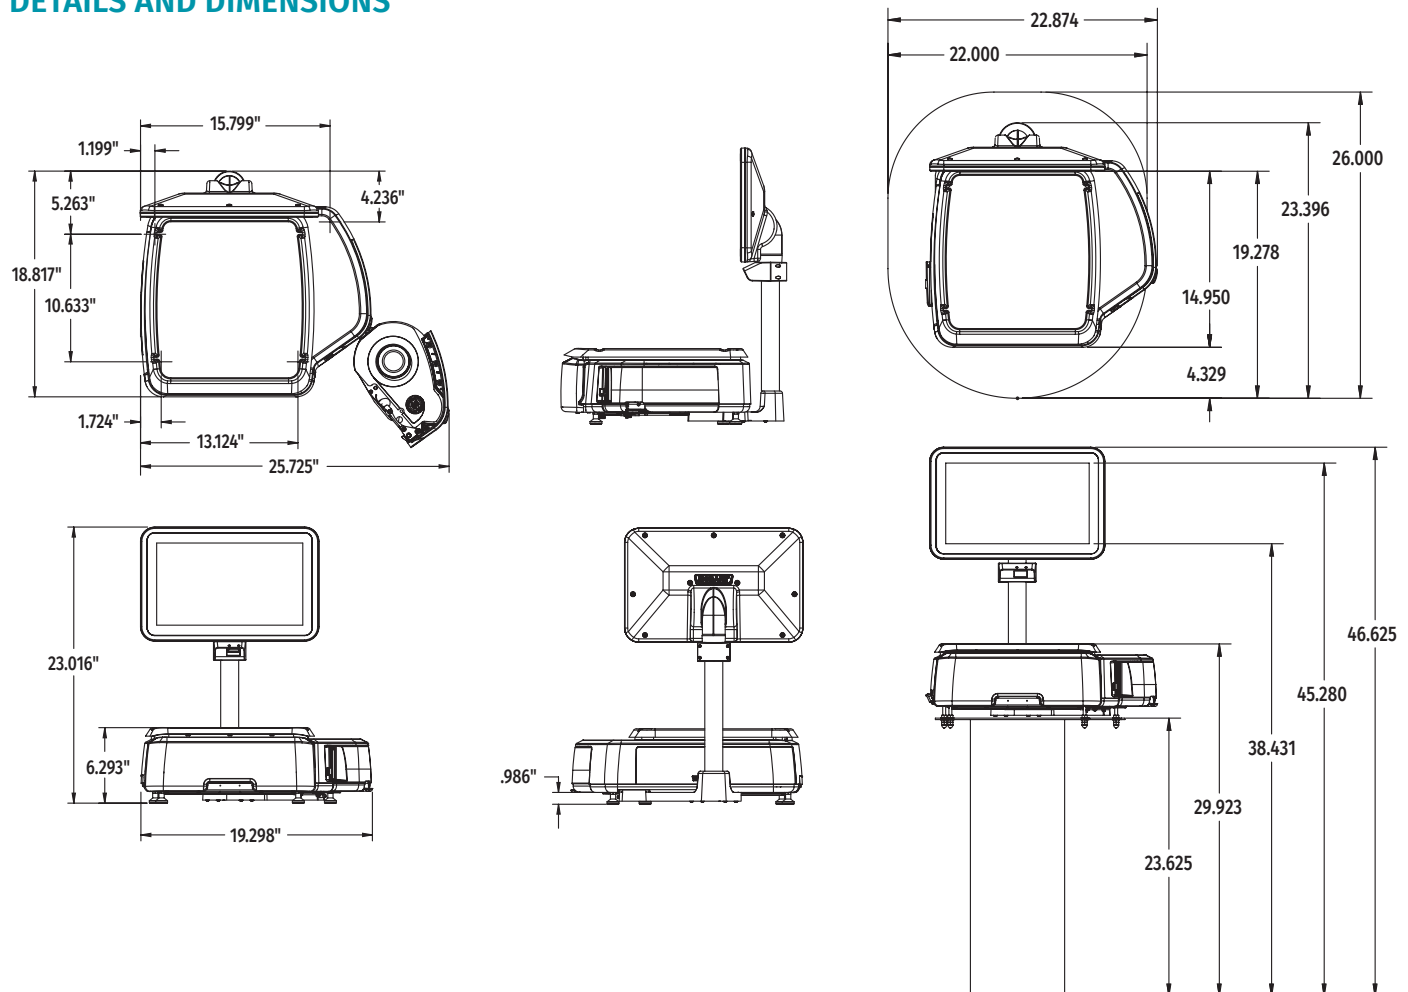
Media Support: MPEG4, AAC, AVC/H.264

Weights and Measures Certification:
+ USA Certification – 13-101
+ Canada Certification – AM-5927C

Environment: Operating temperature limits are 14°F (-10°C) to 104°F (40°C) ambient. Scale operates satisfactorily in relative humidity of 10 to 85%.

Shipping Weight: 50 lbs. (est).

DETAILS AND DIMENSIONS